


FREQUENCY INDEPENDENT DATA

- Description: directional stacked yagi array
optional beam tilting
- Frequency: 326-353 MHz, 365-395 MHz,
380-410 MHz, 405-440 MHz,
440-475 MHz,
- Impedance: 50 ohm
- Gain: 13 dBi
- Polarization: vertical/horizontal
- Connector: N-female/TNC-female
- VSWR: < 1.5
- Radome: UV resistant ABS, RAL 7012,
PU foam filling
- Radiator: copper
- Passive elements: coated aluminium
- Attachment: Ø 35-60 mm, aluminium alloy
bracket, stainless steel V-
bolts and self locking nuts
- Lightning protection: DC-short circuited
- Temperature: -40° - +80°C
- IP: 67

RADIATION PATTERN

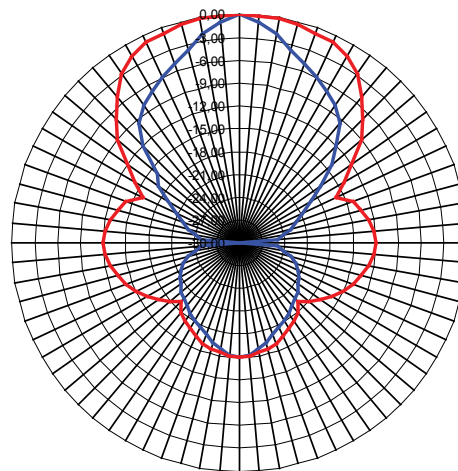

— E dB — H dB