


FREQUENCY INDEPENDENT DATA

- Description: directional stacked yagi array
optional beam tilting
- Frequency: 326-353 MHz, 336-364 MHz,
365-395 MHz, 380-410 MHz,
405-440 MHz, 440-475 MHz,
- Impedance: 50 ohm
- Gain: 13 dBi
- Polarization: vertical/horizontal
- Connector: N-female/TNC-female
- VSWR: < 1.5
- Radome: UV resistant ABS, RAL 7012,
PU foam filling
- Radiator: copper
- Passive elements: coated aluminium
- Attachment: \varnothing 35-60 mm, aluminium alloy
bracket, stainless steel V-bolts and self locking nuts
- Lightning protection: DC-short circuited
- Temperature: -40° - +80°C
- IP: 67

RADIATION PATTERN

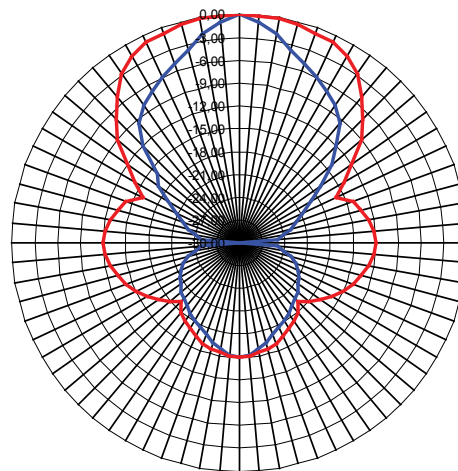

— E dB — H dB