


ComAnt[®] Communications Antennas

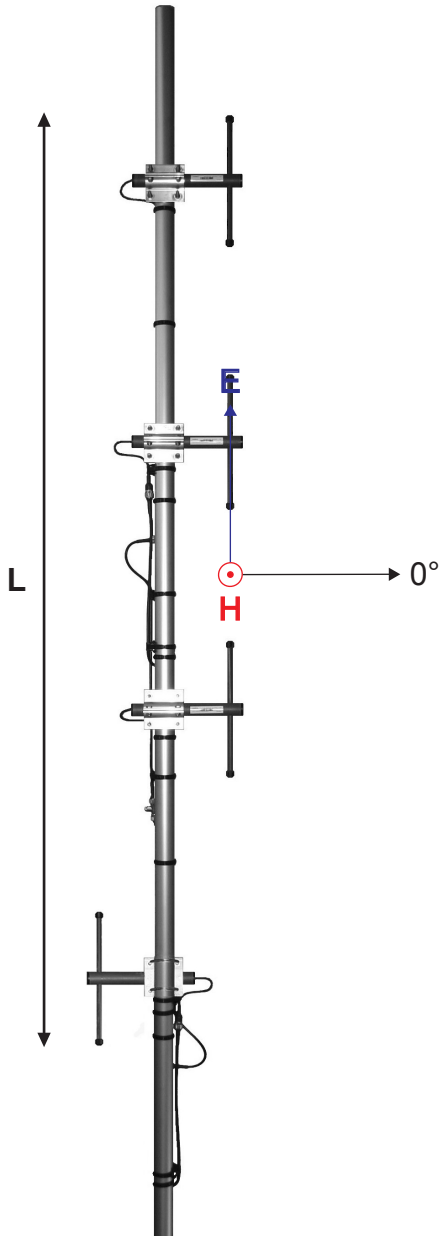

FREQUENCY INDEPENDENT DATA

Description: cardioid pattern notch, field adjustable pattern, optional beam tilting

Frequency: 326-353 MHz, 336-364 MHz, 365-395 MHz, 380-410 MHz, 405-440 MHz, 440-475 MHz

Impedance: 50 ohm

Gain: 8 dBi

H -3 dB: 229°

E -3 dB: 23°

F/B: 30 dB

Polarization: vertical

Connector: N-female/TNC-female

VSWR: < 1.5

Radome: UV resistant ABS/FG, RAL 7012, PU foam filling


Radiator: copper

Attachment: ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self locking nuts

Lightning protection: DC-short circuited

Temperature: -40° - +80°C

IP: 67

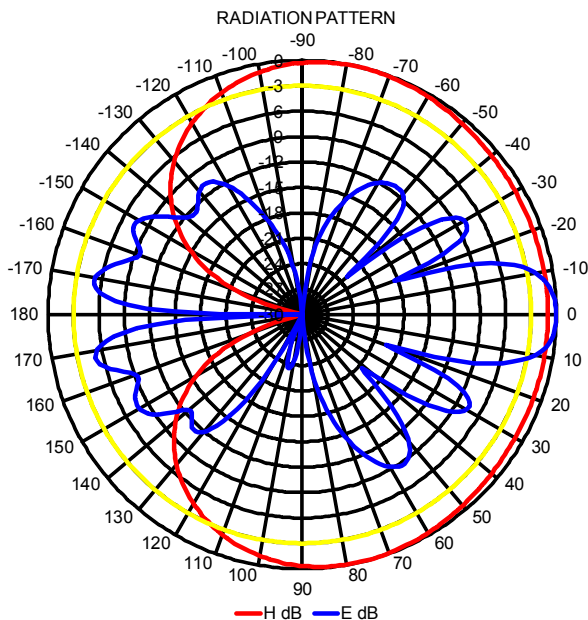

CAN4 CARDIOID PATTERN NOTCH