



ComAnt[®] Communications Antennas

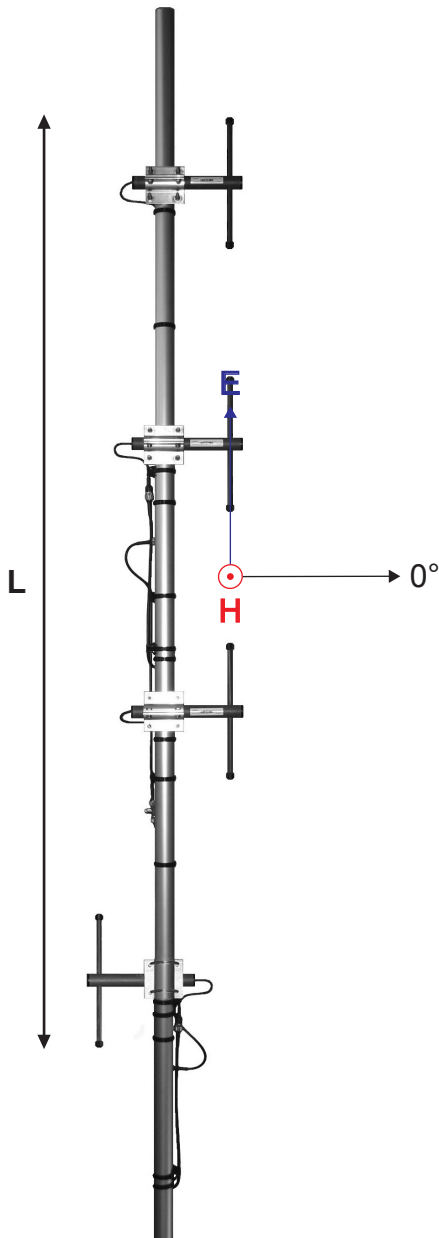

FREQUENCY INDEPENDENT DATA

Description:	cardioid pattern notch, field adjustable pattern, optional beam tilting
Frequency:	326-353 MHz, 336-364 MHz, 365-395 MHz, 380-410 MHz, 405-440 MHz, 440-475 MHz
Impedance:	50 ohm
Gain:	8 dBi
H -3 dB:	229°
E -3 dB:	23°
F/B:	30 dB
Polarization:	vertical
Connector:	N-female/TNC-female
VSWR:	< 1.5
Radome:	UV resistant ABS/FG, RAL 7012, PU foam filling
Radiator:	copper
Attachment:	Ø 35-60 mm, aluminium alloy bracket, stainless steel V- bolts and self-locking nuts
Lightning protection:	DC-short circuited
Temperature:	-40°C - +80°C
IP:	67

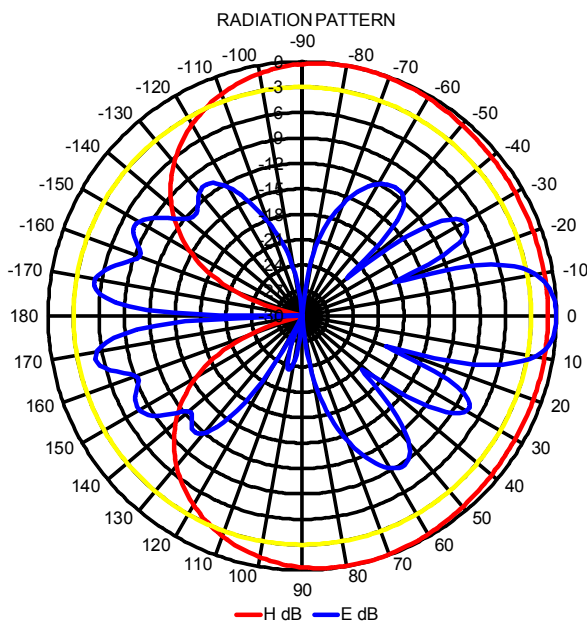

CAN4 CARDIOID PATTERN NOTCH